

## INOX-BALL-QUICK


**Material:** stainless steel 304 or 316  
**Operating temperatures:** -80 to +540°C  
**Thickness:** 0,265 mm  
**Flame resistance:** non-flammable  
**U.V. resistance:** very good  
**Specification:** certification UL 62275


**Applications:** for cables or flexible tubing.



**304:** recommended in extreme temperature applications or flammable like food, chemical, medical ...

**316:** recommended in applications with risk of corrosion, such as shipbuilding, mining, petrochemical, textile ...

High resistance to **corrosion**.

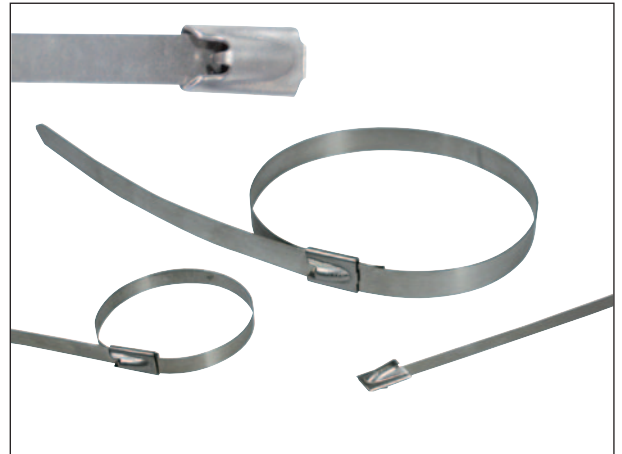

Stainless steel 304		Stainless steel 316		dimensions length x width mm	maximum bundle Ø mm	tensile strength mini (daN)	 pcs
type	article number	type	article number				
IBQ 100/46 N304	0187 0007 000	IBQ 100/46 N316	0187 0027 000	100 x 4,6	18	44	100
IBQ 200/46 N304	0187 0001 000	IBQ 200/46 N316	0187 0021 000	200 x 4,6	50	44	100
IBQ 260/46 N304	0187 0002 000	IBQ 260/46 N316	0187 0022 000	260 x 4,6	69	44	100
IBQ 360/46 N304	0187 0003 000	IBQ 360/46 N316	0187 0023 000	360 x 4,6	100	44	100
IBQ 520/46 N304	0187 0004 000	IBQ 520/46 N316	0187 0024 000	520 x 4,6	151	44	100
IBQ 620/46 N304	0187 0005 000	IBQ 620/46 N316	0187 0025 000	620 x 4,6	183	44	100
IBQ 840/46 N304	0187 0006 000	IBQ 840/46 N316	0187 0026 000	840 x 4,6	253	44	100
IBQ 100/79 N304	0187 0018 000	IBQ 100/79 N316	0187 0037 000	100 x 7,9	18	111	100
IBQ 200/79 N304	0187 0011 000	IBQ 200/79 N316	0187 0031 000	200 x 7,9	50	111	100
IBQ 260/79 N304	0187 0012 000	IBQ 260/79 N316	0187 0032 000	260 x 7,9	69	111	100
IBQ 360/79 N304	0187 0013 000	IBQ 360/79 N316	0187 0033 000	360 x 7,9	100	111	100
IBQ 520/79 N304	0187 0014 000	IBQ 520/79 N316	0187 0034 000	520 x 7,9	151	111	100
IBQ 620/79 N304	0187 0015 000	IBQ 620/79 N316	0187 0035 000	620 x 7,9	183	111	100
IBQ 840/79 N304	0187 0016 000	IBQ 840/79 N316	0187 0036 000	840 x 7,9	253	111	100
IBQ 1000/79 N304	0187 0017 000	-	-	1000 x 7,9	304	111	100

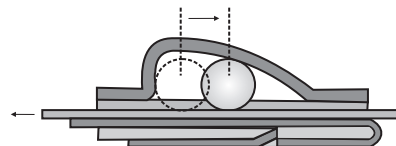


**INOX-MULTI-QUICK**


	<b>IMQ N316</b>	<b>IMQ R316</b>
<b>Material:</b>	stainless steel	stainless steel
<b>Coating:</b>	-	polyester
<b>Temperatures of use:</b>	-80 to +540°C	-30 to +150°C
<b>Thickness:</b>	0,279 mm	0,46 mm
<b>Flame resistance:</b>	non-flammable	-
<b>U.V. resistance:</b>	excellent	very good


**Applications:** these ties can be tightened in steps due to a unique multiple locking system. To apply with a hook or with tensioner on rigid or flexible support.

**316:** recommended in extreme temperature applications and **corrosion**..


**316 coated:** recommended for fragile insulated cables.

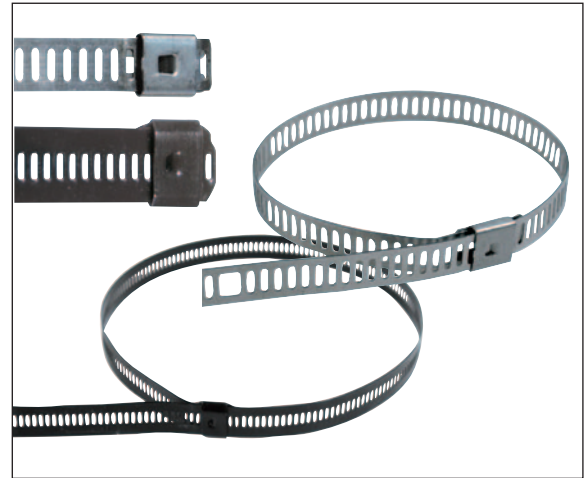

Stainless steel 316		Stainless steel 316 PA coated		dimensions length x width mm	maximum bundle Ø mm	tensile strength mini (daN)	 pcs
type	article number	type	article number				
<b>IMQ 225/70 N316</b>	0187 0101 000	<b>IMQ 225/70 R316</b>	0187 0121 000	225 x 7	58	44	100
<b>IMQ 300/70 N316</b>	0187 0102 000	<b>IMQ 300/70 R316</b>	0187 0122 000	300 x 7	80	44	100
<b>IMQ 450/70 N316</b>	0187 0103 000	<b>IMQ 450/70 R316</b>	0187 0123 000	450 x 7	128	44	100
<b>IMQ 610/70 N316</b>	0187 0104 000	<b>IMQ 610/70 R316</b>	0187 0124 000	610 x 7	179	44	100
<b>IMQ 225/120 N316</b>	0187 0111 000	<b>IMQ 225/120 R316</b>	0187 0131 000	225 x 12	58	111	100
<b>IMQ 300/120 N316</b>	0187 0112 000	<b>IMQ 300/120 R316</b>	0187 0132 000	300 x 12	80	111	100
<b>IMQ 450/120 N316</b>	0187 0113 000	<b>IMQ 450/120 R316</b>	0187 0133 000	450 x 12	128	111	100
<b>IMQ 610/120 N316</b>	0187 0114 000	<b>IMQ 610/120 R316</b>	0187 0134 000	610 x 12	179	111	100

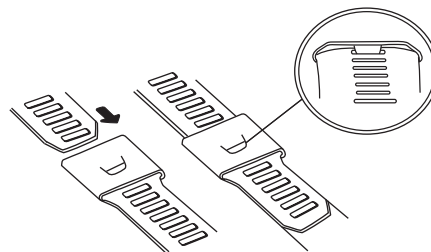




type	article number	description	for ties	weight g	 pces
<b>K111</b>	0187 0240 000	manual pulling and cutting	INOX-BALL-QUICK INOX-MULTI-QUICK <b>PLIOTER</b>	550	1
<b>RR-G01</b>	0187 0250 000	adjustable tension and automatic cut-off.	INOX-BALL-QUICK & INOX-MULTI-QUICK  (width only 7 mm)	550	1



C13/30-01



D6/7/01

